LS-55M(2A) System with mid-level spreader

System	H55(Head) + T72(Tripod) + BR-4(Mid-level spreader) + FP-2(Large rubber feet) + TC-70(Carrying case)		
Payload	10kg / 22lb	Tilt angle	±90°
Weight	5.8kg / 12.8lb	Pan angle	360°
Height	① H : 1590 mm W : 780 mm (※Reference)	Counterbalance	FIX
	② H : 790 mm W : 550 mm (〃)		——
Folded length	③ L : 830 mm (〃)	Drag mode	2STEP
Camera plate (Sliding range)	Sliding plate	Ball diameter	ϕ75 mm
	±40 mm / ±1.6"	Section	2STAGE (Material: Aluminum)
Plate attachment (Screw sliding range)	Type:1/4-20UNC screw with video pin	Tripod fixation	Fixing lock knob
	52 mm	Spreader	BR-4 (Telescopic, Removable)
Spare screw	Type:3/8-16UNC screw	Pan handle	PH-7
	Equipped on the top of the head (beneath sliding plate)	Case material	Nylon

Remarks

■Exterior Dimensions (mm)

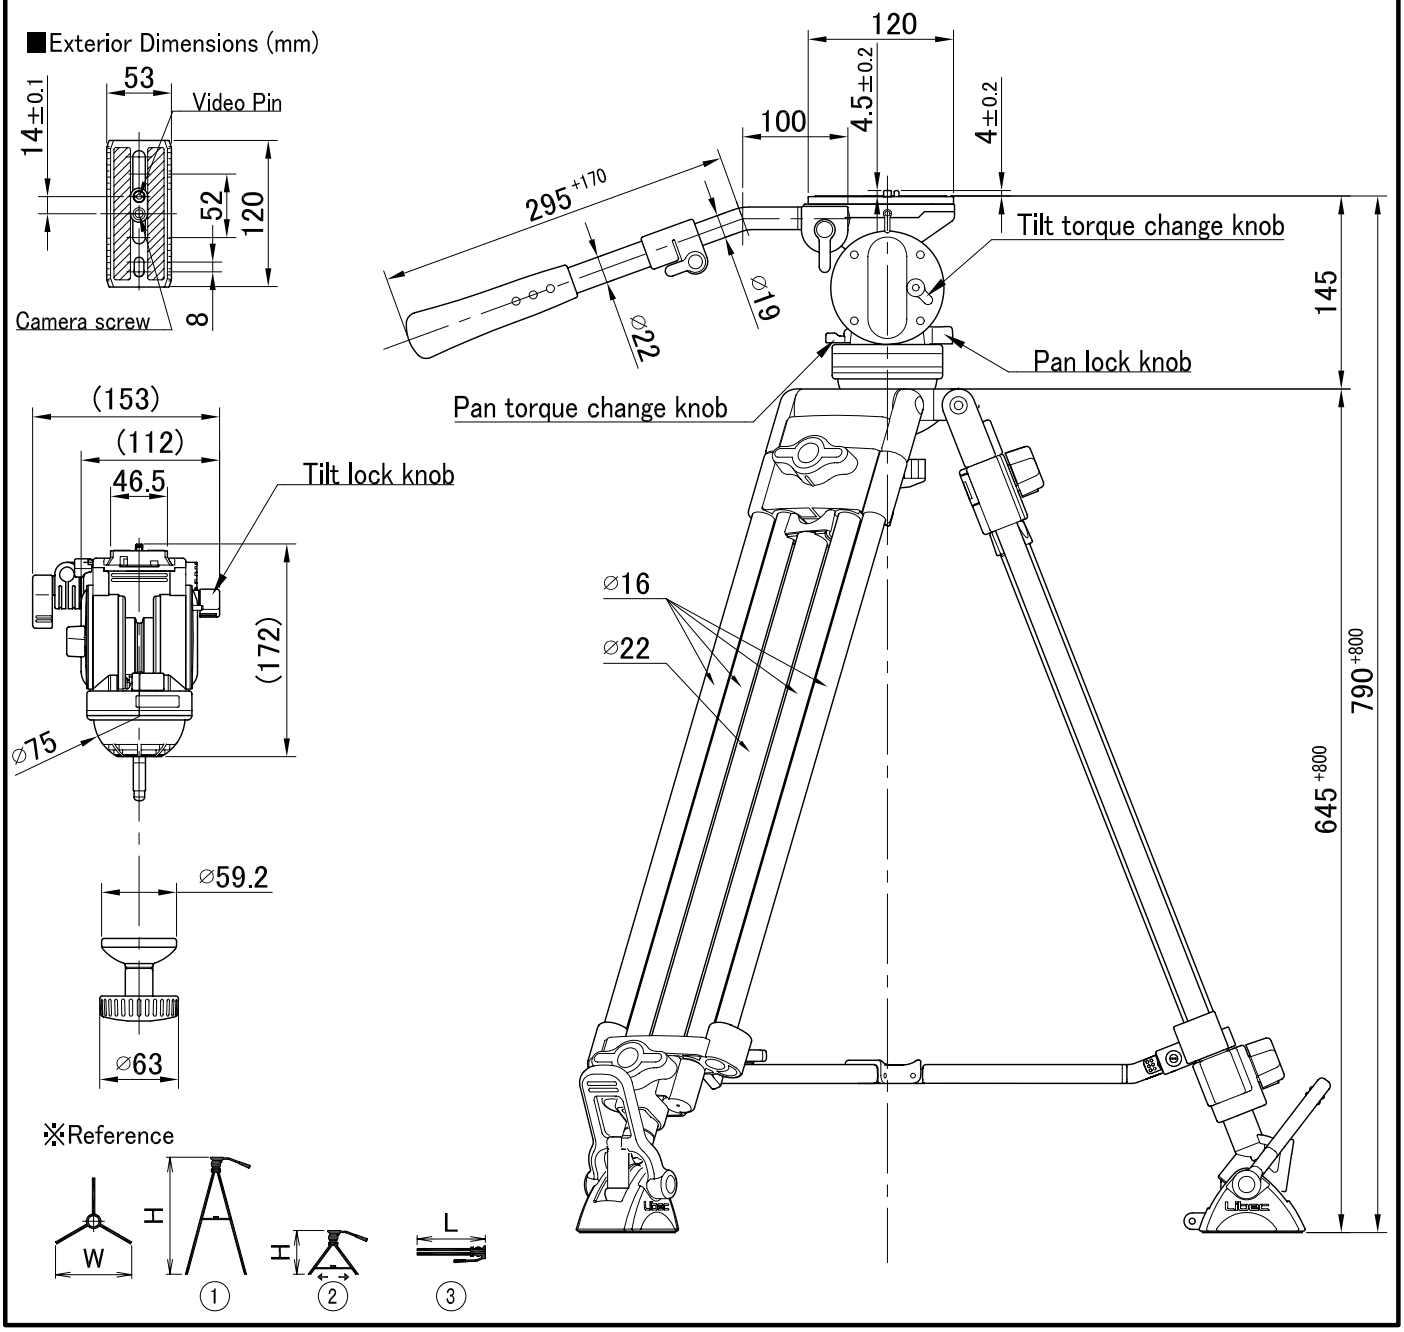

Manufacturer : HEIWA SEIKI KOGYO CO., LTD.
978-1, Nishibukuro, Yashio-City, Saitama, 340-0833 Japan TEL . +81-48-995-1301 FAX . +81-48-997-0804 http://www.libec.co.jp

1012
DWG.NO.:50-00045-E