Libec RS-250M System with mid-level spreader

System	RH25(Head) + RT30B(Tripod) + BR-2B(Mid-level spreader) + FP-2B(Large rubber feet) + RC-30(Carrying case)		
Payload	6kg / 13lb	Tilt angle	+90° /-70° (Limited to ±40° with maximum counterbalance)
Weight	5.6kg / 12.3lb	Pan angle	360°
Height	① H : 1645 mm W : 800 mm (※Reference)	Counterbalance	Range : 1.8 kg-5 kg / 4-11 lb (CG100 mm)
	② H : 800 mm W : 570 mm (〃)		System : Continuous
Folded length	③ L : 845 mm (〃)	Drag mode	2STEP
Camera plate (Sliding range)	Sliding plate	Ball diameter	⌀75 mm
	±40 mm / ±1.6"	Section	2STAGE (Material: Aluminum)
Plate attachment (Screw sliding range)	Type:1/4-20UNC screw with video pin	Tripod fixation	Fixing lock knob
	52 mm	Spreader	BR-2B (Telescopic, Removable)
Spare screw	Type:1/4-20UNC , 3/8-16UNC screws	Pan handle	PH-4B
	Equipped on the top of the head (beneath sliding plate)	Case material	Nylon

Remarks

■Exterior Dimensions (mm)

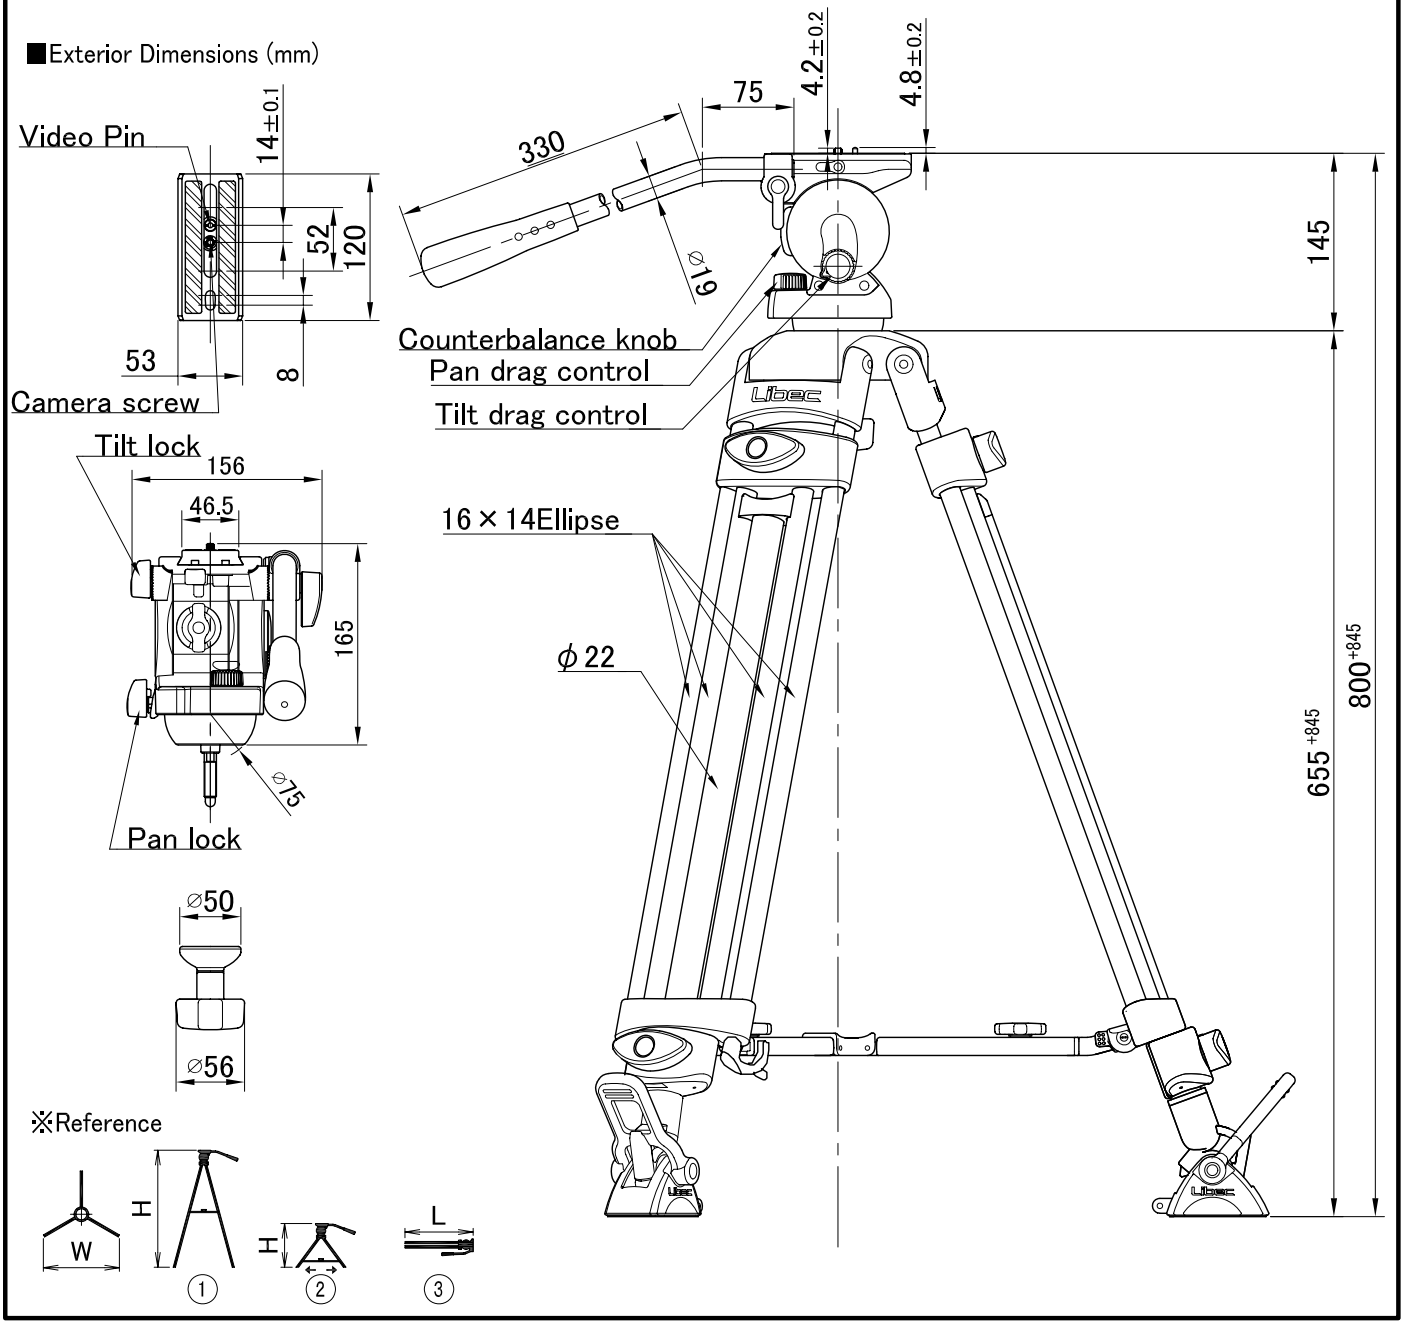

Manufacturer : HEIWA SEIKI KOGYO CO., LTD.
978-1, Nishibukuro, Yashio-City, Saitama, 340-0833 Japan TEL . +81-48-995-1301 FAX . +81-48-997-0804 http://www.libec.co.jp

1110
DWG.NO.:50-00043-E