


<b>System</b>	H25 (Head) + QL40C (Tripod) + SP-1B (Floor spreader) + RC-30 (Carrying case)		
<b>Payload</b>	5 kg / 11.0 lb	<b>Tilt angle</b>	+90° / -70° (Limited to ±50° with max counterbalance)
<b>Weight</b>	5.8 kg / 12.8 lb	<b>Drag mode</b>	Free plus 3 steps
<b>Operating Dimensions</b>	① H : 1680 mm W : 710 mm (※Reference)	<b>Temperature range</b>	-40 °C ~ +60 °C / -40 °F ~ 140 °F
	② H : 550 mm W : 1090 mm ( " )	<b>Accessory port</b>	1/4" and 3/8" screw holes (head : 1set , tripod : 3sets)
<b>Folded length</b>	③ L : 845 mm ( " )	<b>Head base</b>	Ball 75 mm
<b>Camera plate</b>	Sliding plate (compatible with Manfrotto and Sachtler)	<b>Carrying handle</b>	Included
	One touch attach and release mechanism	<b>Section</b>	2-Stage
<b>Counterbalance</b>	Range : 1.7 ~ 4.5 kg / 3.7 ~ 9.9 lb (C.G. 100 mm)	<b>Leg lock system</b>	Flip lock
	Perfect Balance	<b>Spreader</b>	SP-1B (Telescopic , Removable)
	Continuous Counterbalance with Illuminated Meter	<b>Case material</b>	Nylon , Polyester , TPE , PE , PP , POM


### Remarks

\* Includes adjustment tool.

### ■ Exterior Dimensions (mm)

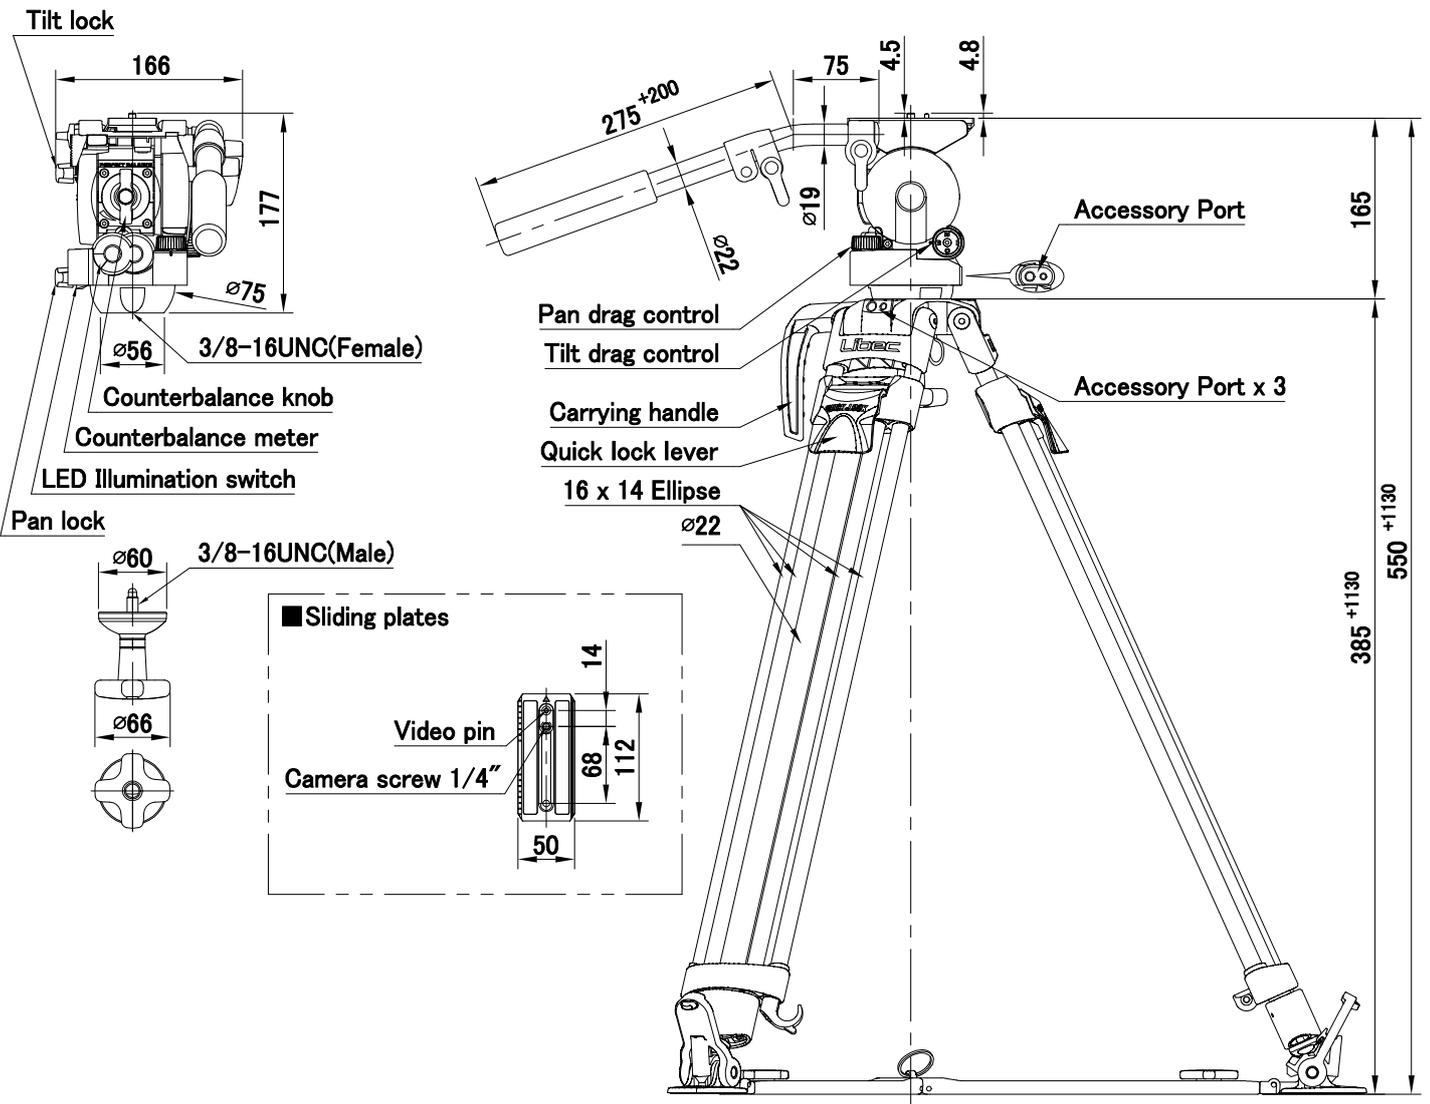

※ Reference

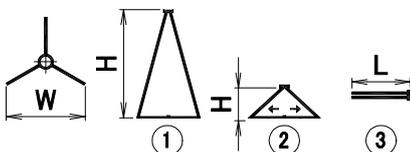

■ Adjustment tool

Across flats 5.5 (socket)

