


System	H35 (Head) + QL40C (Tripod) + BR-2B (Mid-level spreader) + FP-1B (Large rubber feet) + RC-30 (Carrying case)		
Payload	8 kg / 17.6 lb	Tilt angle	+90° / -70° (Limited to ±40° with max counterbalance)
Weight	5.5 kg / 12.1 lb	Drag mode	Free plus 3 steps
Operating Dimensions	① H: 1670 mm W: 780 mm (※Reference)	Temperature range	-40 °C ~ +60 °C / -40 °F ~ 140 °F
	② H: 800 mm W: 550 mm (")	Accessory port	1/4" and 3/8" screw holes (head : 1set , tripod : 3sets)
Folded length	③ L: 845 mm (")	Head base	Ball 75 mm
Camera plate	Sliding plate (compatible with Manfrotto and Sachtler)	Carrying handle	Included
	One touch attach and release mechanism	Section	2-Stage
Counterbalance	Range : 3.0 ~ 7.5 kg / 6.6 ~ 16.5 lb (C.G. 100 mm)	Leg lock system	Flip lock
	Perfect Balance	Spreader	BR-2B (Telescopic , Removable)
	Continuous Counterbalance with Illuminated Meter	Case material	Nylon , Polyester , TPE , PE , PP , POM


Remarks

* Includes adjustment tool.

■ Exterior Dimensions (mm)

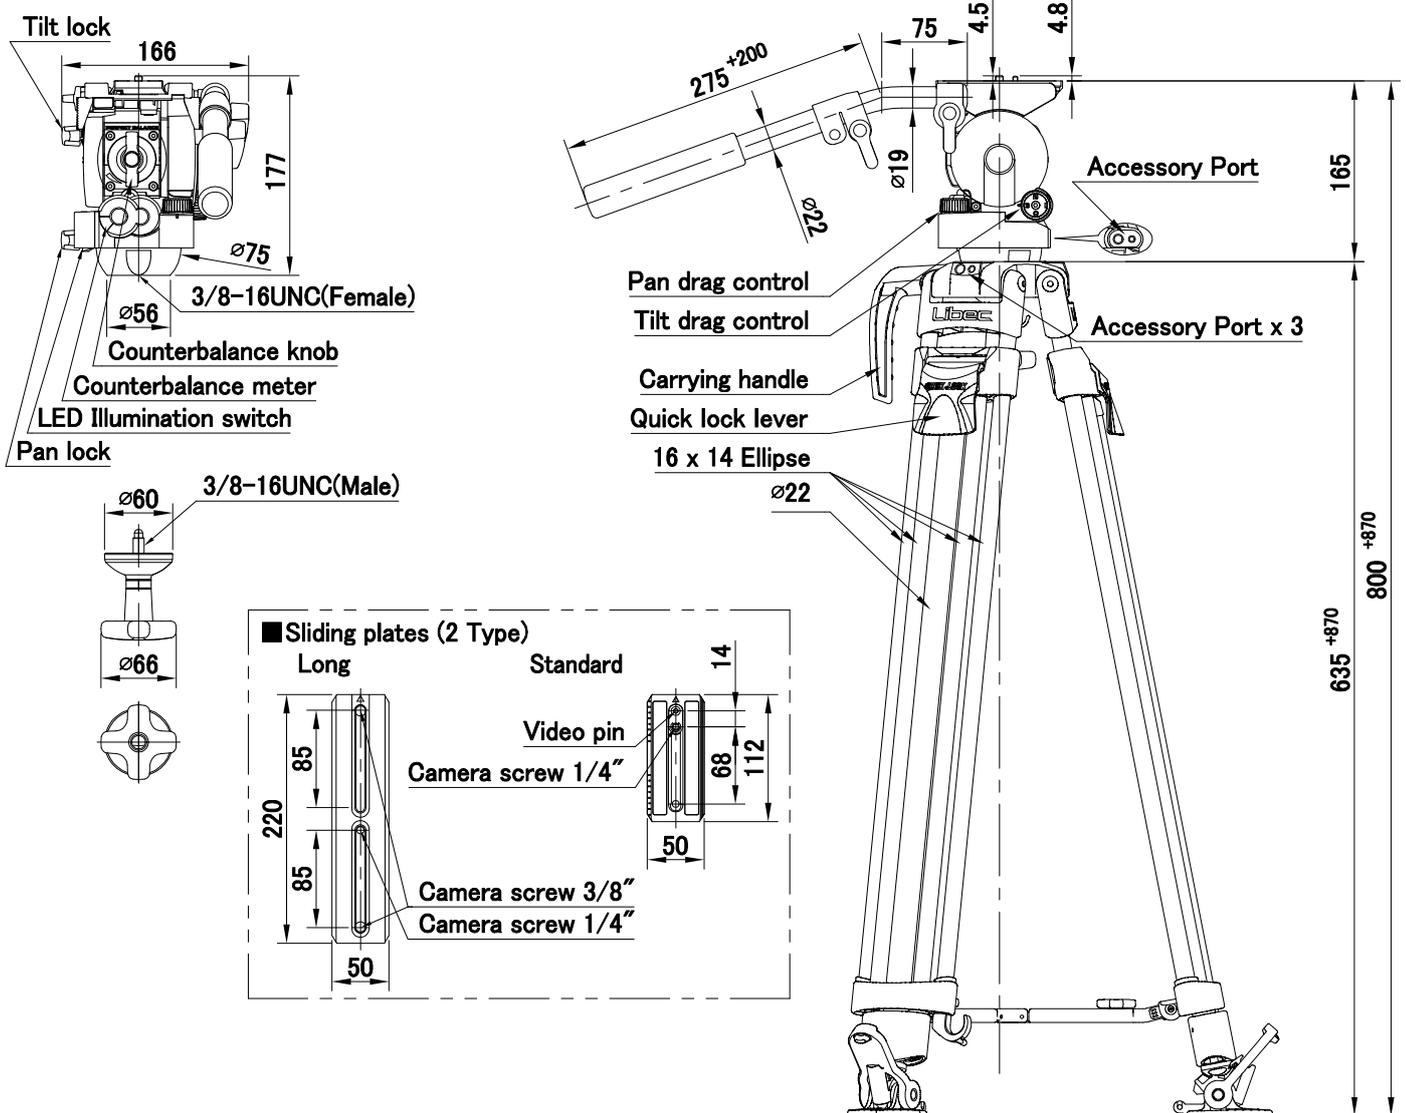

※ Reference

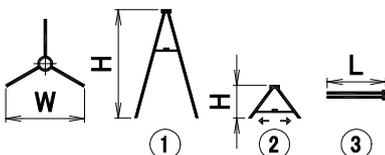

■ Adjustment tool
Across flats 5.5 (socket)

