Libec HS-450QC

System	H45 (Head) + QL40C (Tripod) + SP-1B (Floor spreader) + RC-30 (Carrying case)		
Payload	12 kg / 26.4 lb	Tilt angle	+90° / -70° (Limited to ±40° with max counterbalance)
Weight	5.8 kg / 12.8 lb	Drag mode	Free plus 3 steps
Operating Dimensions	① H : 1680 mm W : 710 mm (※Reference)	Temperature range	-40 ℃ ～ +60 ℃ / -40 ℉ ～ 140 ℉
	② H : 550 mm W : 1090 mm (〃)	Accessory port	1/4″ and 3/8″ screw holes (head : 1set , tripod : 3sets)
Folded length	③ L : 845 mm (〃)	Head base	Ball 75 mm
Camera plate	Sliding plate (compatible with Manfrotto and Sachtler)	Carrying handle	Included
	One touch attach and release mechanism	Section	2-Stage
Counterbalance	Range : 4.5 ～ 10.5 kg / 9.9 ～ 23.1 lb (C.G. 100 mm)	Leg lock system	Flip lock
	Perfect Balance	Spreader	SP-1B (Telescopic , Removable)
	Continuous Counterbalance with Illuminated Meter	Case material	Nylon , Polyester , TPE , PE , PP , POM

Remarks

* Includes counter balance auxiliary knob and adjustment tool.

■Exterior Dimensions (mm)

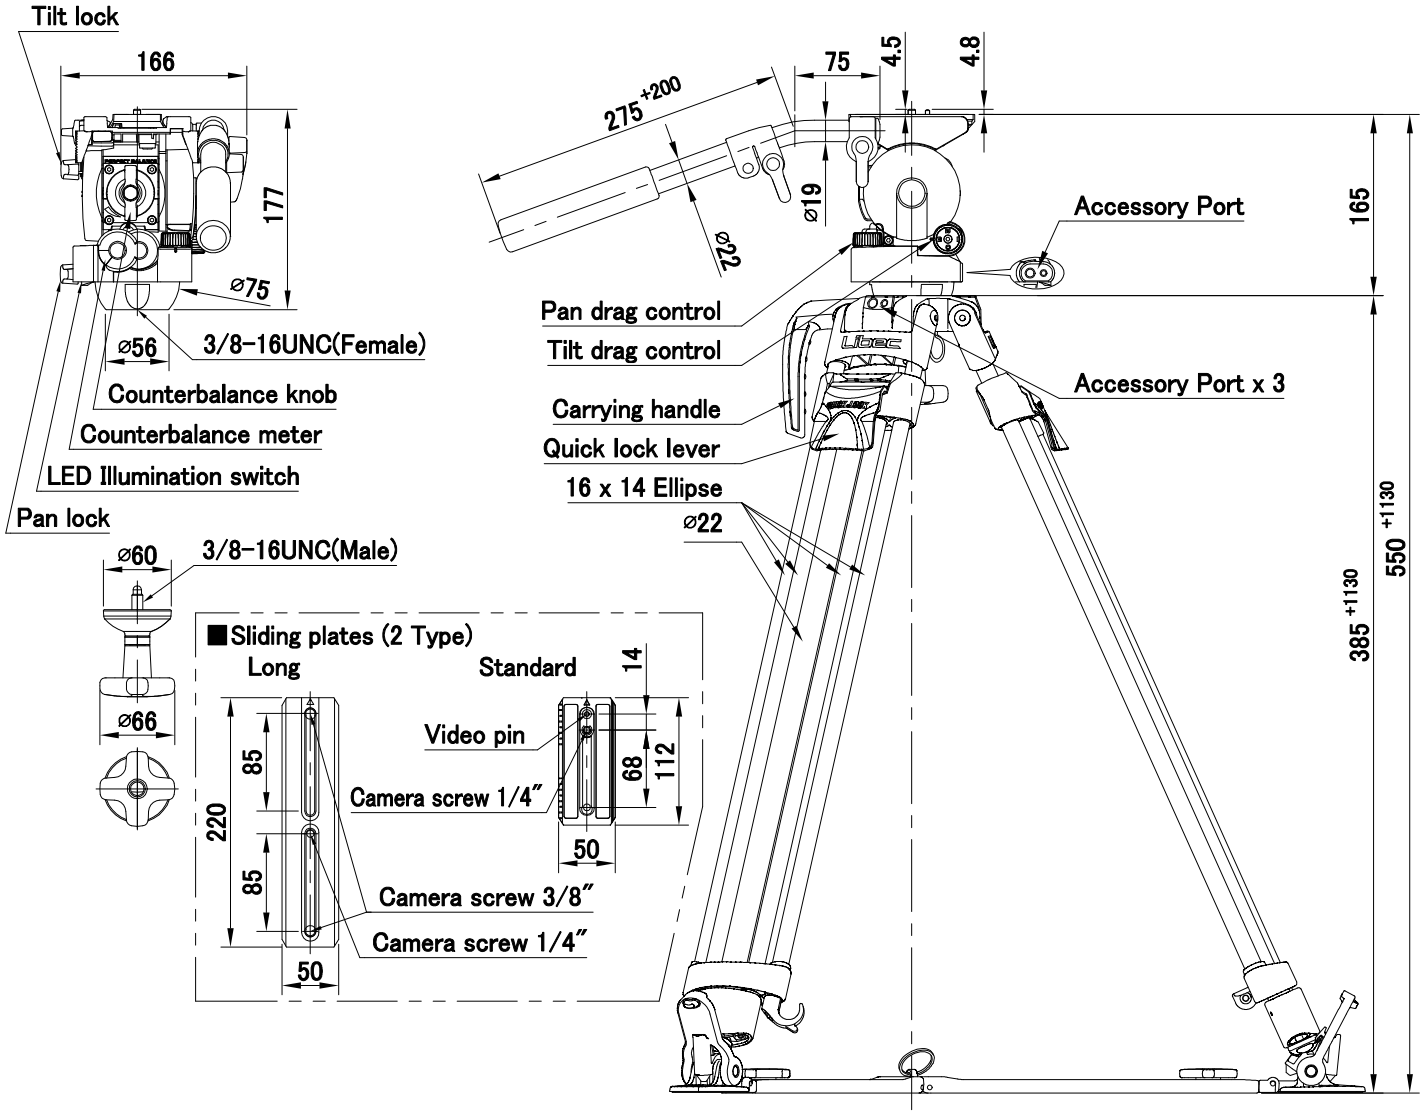

※ Reference

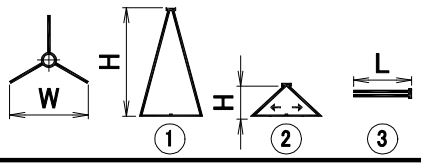

■Counterbalance support knob



※ Allows smooth turning of the Counterbalance knob.

■Adjustment tool

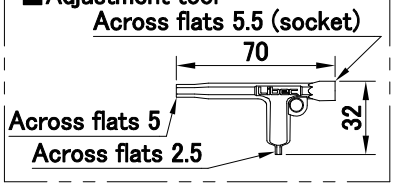

Manufacturer : HEIWA SEIKI KOGYO CO., LTD.
978-1, Nishibukuro, Yashio-City, Saitama, 340-0833 Japan TEL . +81-48-995-1301 FAX . +81-48-997-0804 http://www.libec-global.com

2512
DWG NO.50-00136-E