


Available models	LX-ePed 2 / LX-ePed 2 Studio / LX-ePed PRO		
Weight	0.47 kg / 1.04 lb	Input Voltage	12 V
Operational Mode	IP Connection , Serial Connection , Manually Control	Current Consumption	2 A
Supported Protocols	IP : XC , AW-IP , VISCA over IP	Temperature range	-10 °C ~ 40 °C / 14 °F ~ 104 °F · Below RH 80% (no condensation)
	SERIAL : NU , AW-SERIAL , VISCA	Power	AC/DC Adapter : 100 V ~ 240 V
Interface	IP Connection Port (RJ-45)	Length (Cable, etc.)	Battery-powered (optional)
	Serial Connection Port (RJ-45)		AC/DC Adapter : 3 m / 9.84'
	LX-ePed Connection Port (RJ-45)		LX-ePed Connection LAN Cable : 3 m / 9.84'
	LX-ePed PC APP Connection Port (USB-C)		USB-C Cable for LX-ePed PC APP : 1.5 m / 4.92'
	DC Port		Conversion Connector for Canon RC-IP100 : 0.13 m / 0.43'
			Fixing Strap : 0.37 m / 1.21'
Remarks			

■ Exterior Dimensions (mm)



※ Interface

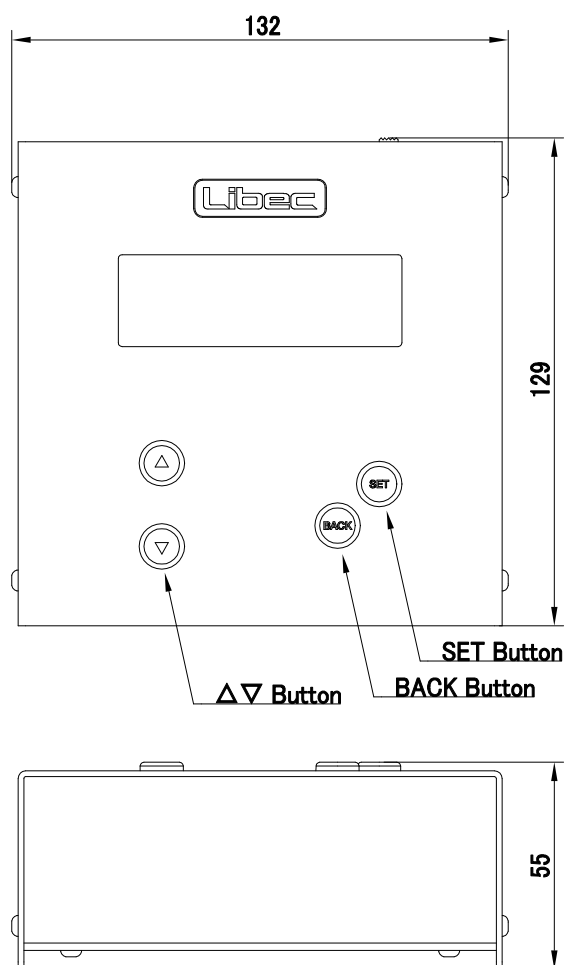