


System	NH20 (Head) + QL40C (Tripod) + BR-2B (Mid-level spreader) + FP-1B (Large rubber feet) + RC-30 (Carrying case)		
Payload	4 kg / 8.8 lb	Drag mode	Free plus 3 steps
Weight	4.5 kg / 9.9 lb	Temperature range	-40 °C ~ +60 °C / -40 °F ~ 140 °F
Operating Dimensions	① H : 1670 mm W : 780 mm (※Reference)	Accessory port	1/4" and 3/8" screw holes (head : 1set, tripod : 3sets)
	② H : 800 mm W : 550 mm (")	Head base	Ball 75 mm
Folded length	③ L : 845 mm (")	Carrying handle	Included
Camera plate	Sliding plate (compatible with Manfrotto and Sachtler)	Section	2-Stage
	One touch attach and release mechanism	Leg lock system	Flip lock
Counterbalance	Range : 0 ~ 2.5 kg / 0 ~ 5.5 lb (C.G. 55 mm)	Spreader	BR-2B (Telescopic , Removable)
	Free plus 5 steps	Case material	Nylon , Polyester , TPE , PE , PP , POM
Tilt angle	+90° / -70°		


Remarks

* Includes adjustment tool.


■ Exterior Dimensions (mm)

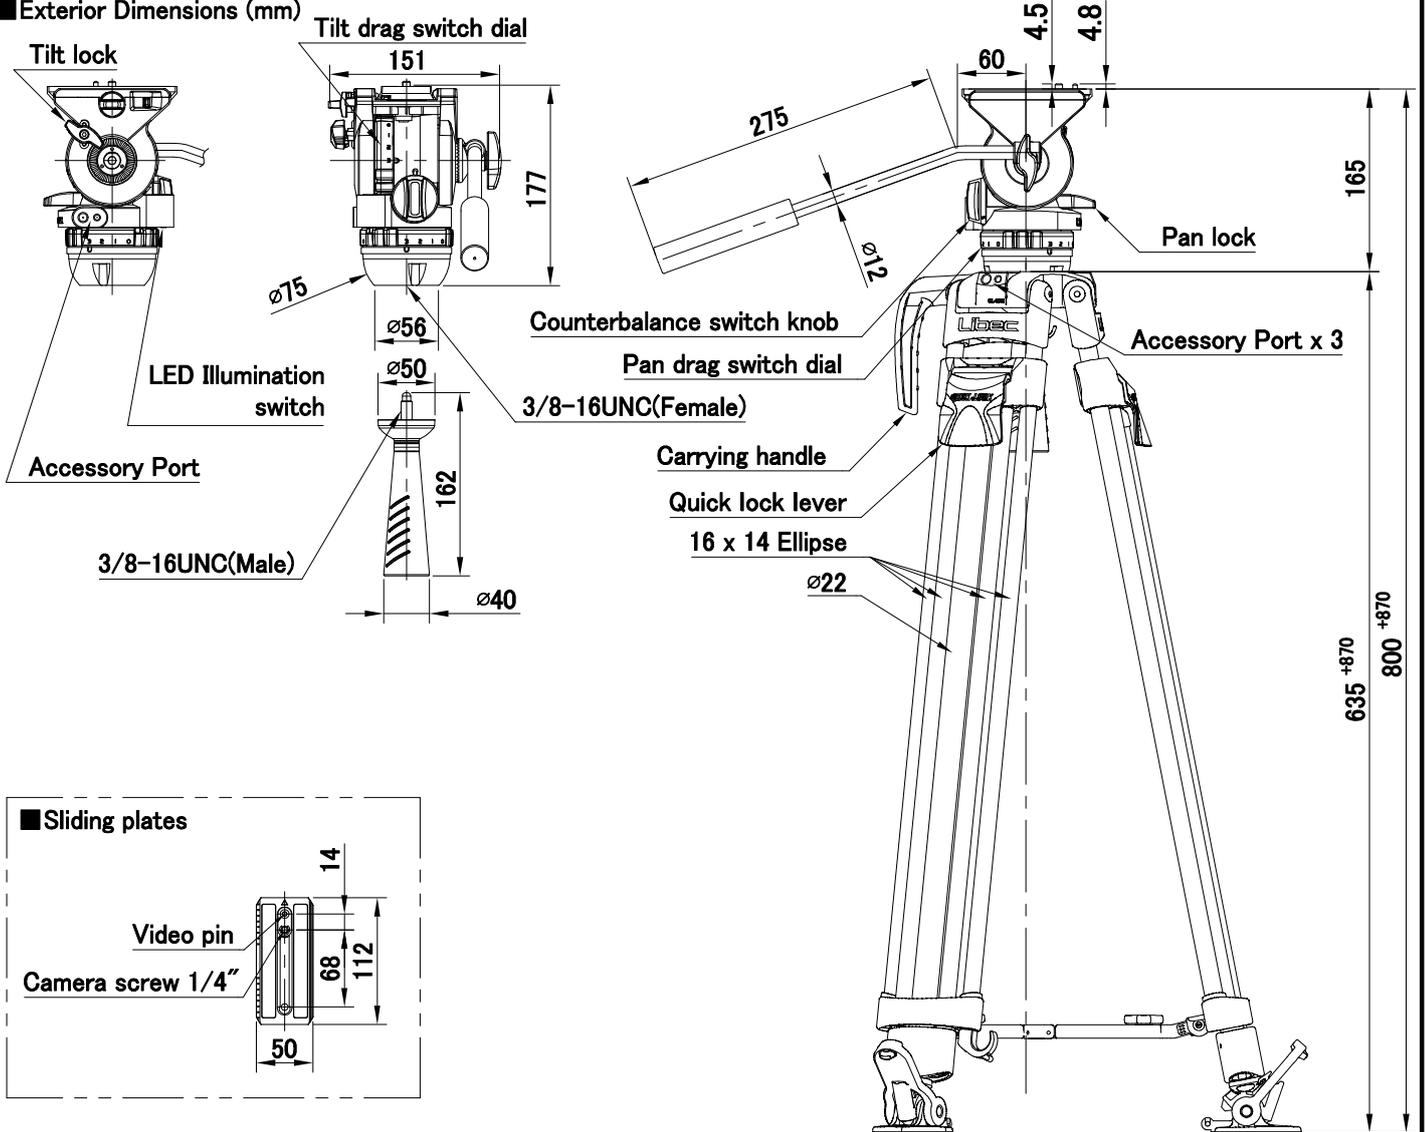

■ Sliding plates

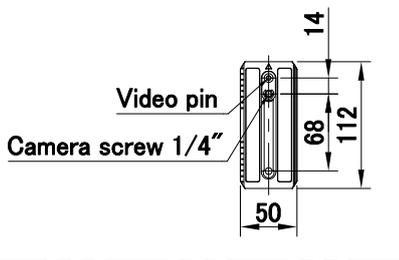

※ Reference

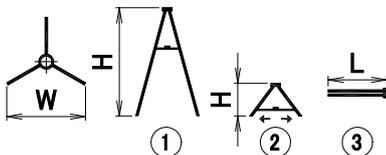

■ Adjustment tool

