


System	NH20 (Head) + QL40C (Tripod) + SP-1B (Floor spreader) + RC-30 (Carrying case)		
Payload	4 kg / 8.8 lb	Drag mode	Free plus 3 steps
Weight	4.8 kg / 10.6 lb	Temperature range	-40 °C ~ +60 °C / -40 °F ~ 140 °F
Operating Dimensions	① H : 1680 mm W : 710 mm (※Reference)	Accessory port	1/4" and 3/8" screw holes (head : 1set , tripod : 3sets)
	② H : 550 mm W : 1090 mm (")	Head base	Ball 75 mm
Folded length	③ L : 845 mm (")	Carrying handle	Included
Camera plate	Sliding plate (compatible with Manfrotto and Sachtler)	Section	2-Stage
	One touch attach and release mechanism	Leg lock system	Flip lock
Counterbalance	Range : 0 ~ 2.5 kg / 0 ~ 5.5 lb (C.G. 55 mm)	Spreader	SP-1B (Telescopic , Removable)
	Free plus 5 steps	Case material	Nylon , Polyester , TPE , PE , PP , POM
Tilt angle	+90° / -70°		

Remarks

* Includes adjustment tool.

■ Exterior Dimensions (mm)

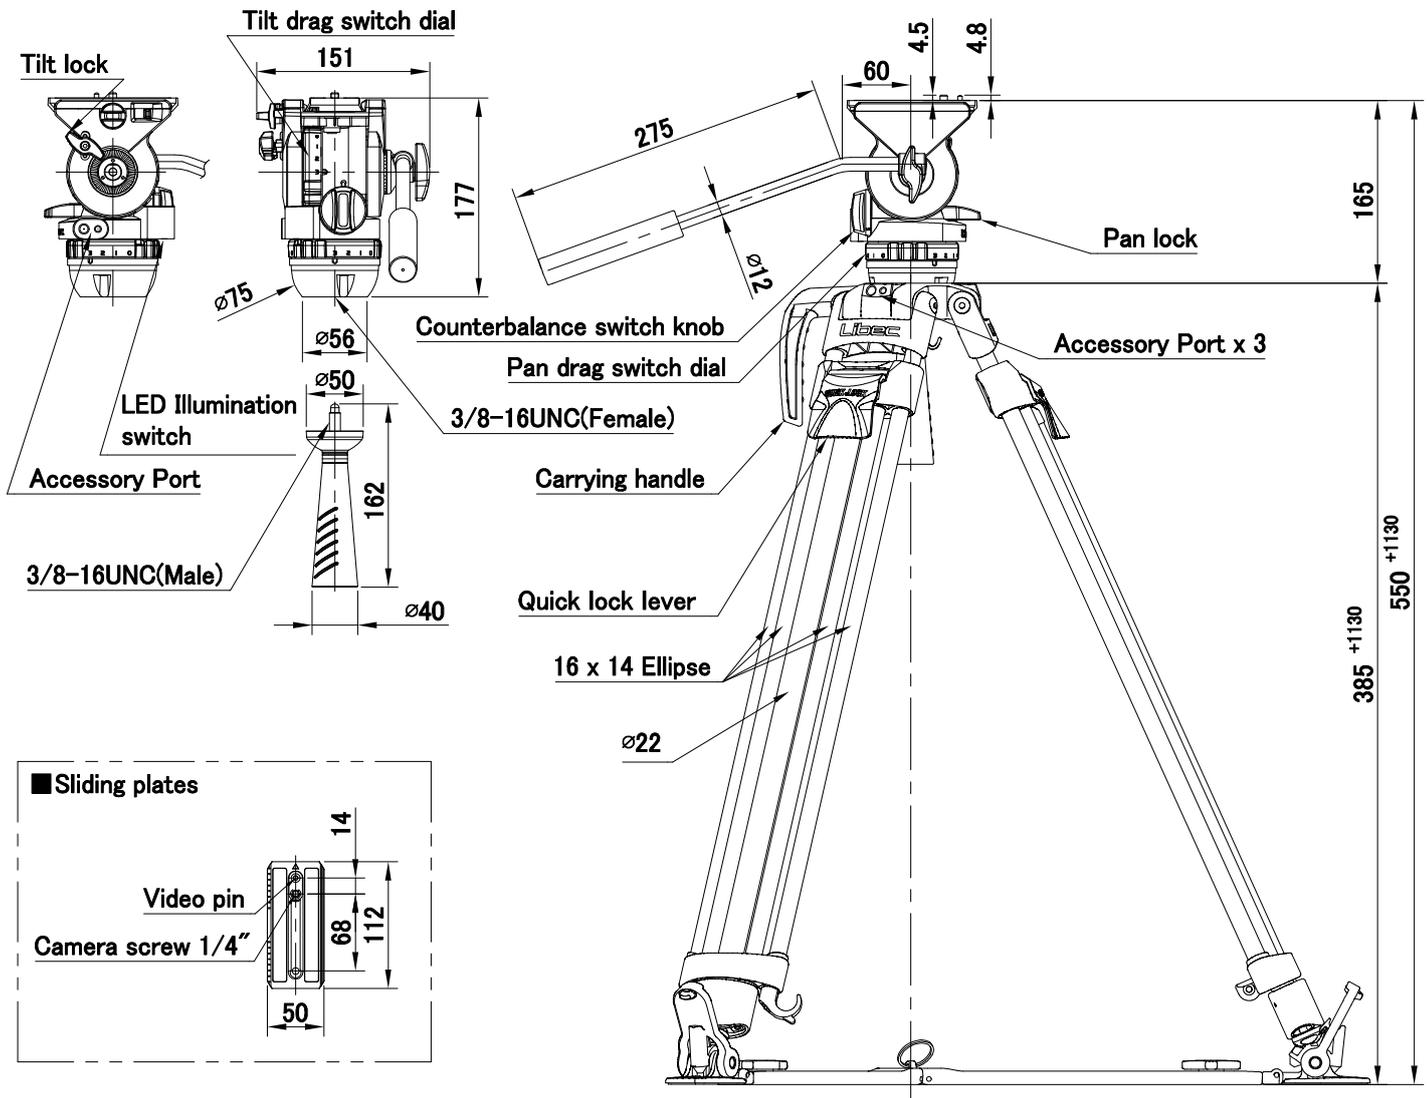

※ Reference

