Libec RS-350D System with floor spreader

System	RH35D (Head) + RT30B (Tripod) + SP-2B (Floor spreader) + RC-30 (Carrying case)		
Payload	9 kg / 19.8 lb	Tilt angle	+90° / -70° (Limited to ±40° with max counterbalance)
Weight	6.2 kg / 13.6 lb	Pan angle	360°
Operating Dimensions	① H : 1660 mm W : 710 mm (※ Reference)	Counterbalance	Range : 3 – 7.5 kg / 6.6 – 16.5 lb (CG 100 mm)
	② H : 560 mm W : 1110 mm (〃)		System : Continuous
Folded length	③ L : 855 mm (〃)	Drag mode	Free plus 3 STEPS
Camera plate (Sliding range)	Sliding plate	Ball diameter	⌀75 mm
	±40 mm / ±1.6"	Section	2 STAGE (Material: Aluminum)
Plate attachment (Screw sliding range)	Type : 1/4-20UNC screw with video pin	Tripod fixation	Fixing lock knob
	76 mm / 3"	Spreader	SP-2B (Telescopic, Removable)
Spare screw	Type : 1/4-20UNC , 3/8-16UNC screws	Pan handle	PH-6B
	Equipped on the top of the head (beneath sliding plate)	Case material	Nylon, EVA, PU, PP, POM

Remarks

※ Counterbalance support knob is included

■Exterior Dimensions (mm)

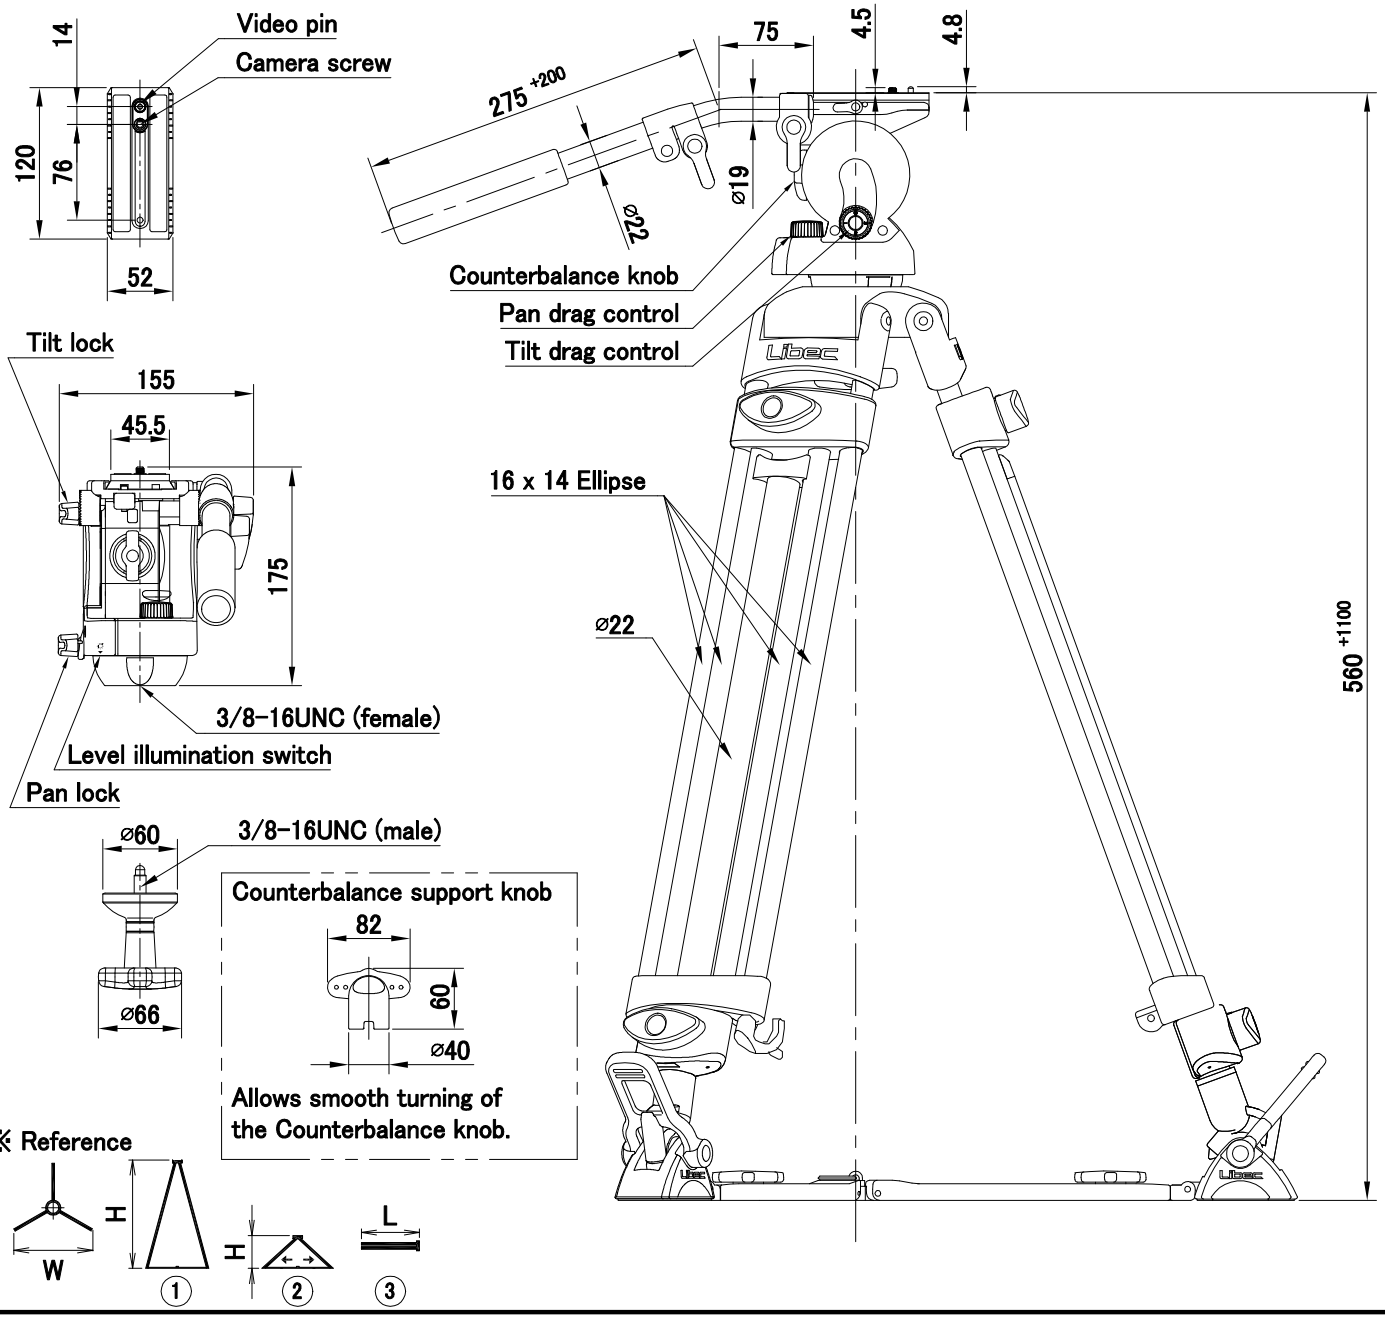

Manufacturer : HEIWA SEIKI KOGYO CO., LTD.

978-1, Nishibukuro, Yashio-City, Saitama, 340-0833 Japan TEL . +81-48-995-1301 FAX . +81-48-997-0804 http://www.libec-global.com

2605

DWG NO.50-00161-E