


System	SVF-7Pro (Full HD 7" Viewfinder for studio cameras)		
Panel Type	TFT-LCD	SDI Input	BNC x 1
Panel Size	7" diagonal	SDI Output	BNC x 1, SDI IN input through output
Display Size	151 (H) x 85 (V) mm / 5.94 (H) x 3.35 (V) "	SDI Return Input	BNC x 1
Panel Aspect Ratio	16 : 9	HDMI Input	HDMI x 1
Picture Resolution	1920 (H) x 1080 (V)	HDMI Output	HDMI x 1, HDMI IN input through output
Viewing Angle	170° (H) / 170° (V)	CAMERA Input	20pin x 1, Analog HD component (Y/PB/PR or G/B/R)
Color Reproduction	16.7M colors	TALLY In	TALLY1 : BNC x 1, Green (2V - 4V) / Red (4.1V - 5V) / OFF (0V - 2V)
Brightness	350 cd / m ²		TALLY2 : BNC x 1, Red (ON / Short to GND) / OFF (Open)
Weight	1.2 kg / 2.65 lb (Without accessories)	TALLY Indicator	Front tally x 2 sets, Green / Red Brightness adjustable
Power Consumption	12 W		Rear tally x 1, Red Brightness adjustable
Operating Temp.	0 °C ~ 40 °C / 32 °F ~ 104 °F	Video Input Signal	1080p (59.94 / 50 / 29.97 / 25 / 24 / 23.98)
Operating Humidity	30 % ~ 85 % (No condensation)		1080i (59.94 / 50)
Storage Temperature	-10°C ~ 45 °C / 14 °F ~ 113 °F		1080PsF (29.97 / 25 / 24 / 23.98)
Storage Humidity	0 % ~ 90 %		720p (59.94 / 50)

Remarks

※ Connection Cable and Shoe Attachment for cameras not included, please be sure to purchase either the CA-7S, the CA-7I, or the CA-7H.

■Exterior Dimensions (mm)

■SVF-7Pro Main Body

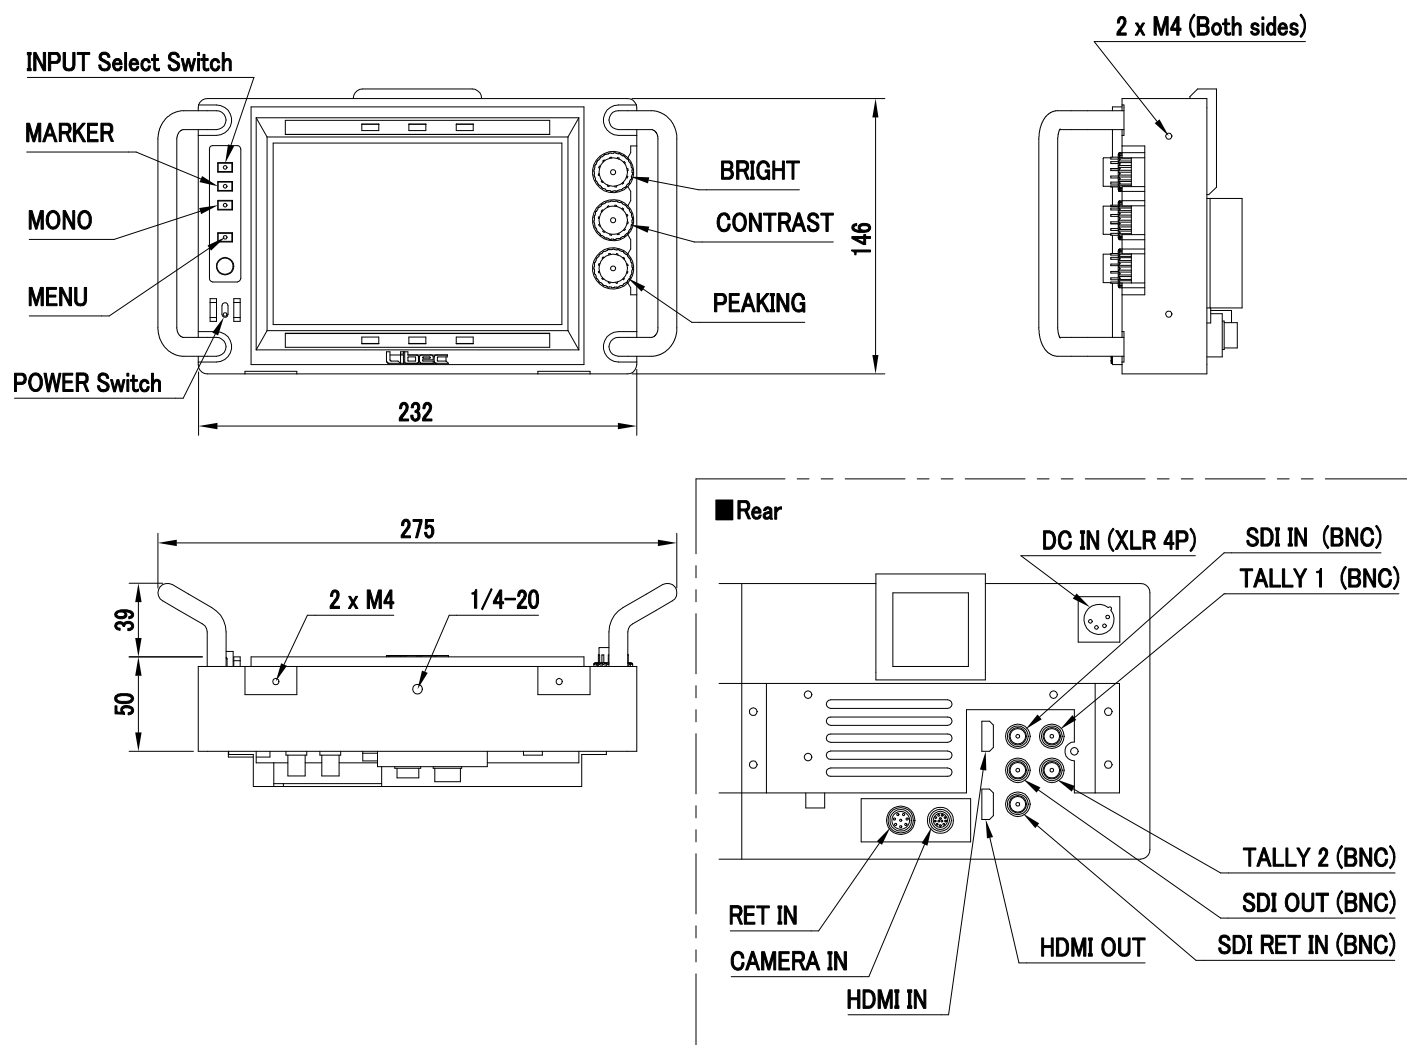

■ Exterior Dimensions (mm)

■ Bracket

